

Powermaster®

BOILERS

Powermaster

WB-A2-4P

- » Capacities: **80 to 1000 BHP** High & Low Pressure.
- » Dry saturated steam.
- » Fuels: **Diesel, LPG, Nat gas or Heavy Oil.**
- » Highest guaranteed efficiencies.
- » Cutting edge technology.




Liaison Office
Houston, Texas

8300 Cypress Creek Parkway
Suite 450 | Houston, TX 77070
T. (832) 631 6063

www.powermasterboiler.com

Characteristics

- » Four pass Wet-Back firetube packaged boiler.
- » Designed and manufactured as per ASME Section I and IV.
- » Hot corrugated furnace chamber with low fatigue coefficient.
- » Integrated control panel.
- » Automatic operation.
- » Wet-Back (water submerged smoke reversal chamber).
- » Hinged/removable front doors and hinged back doors.
- » Gas side backpressure openings.
- » Structural steel base.
- » No refractory in doors.
- » Fitted with Weishaupt, Riello, Webster, Johnson or Powerflame burner.

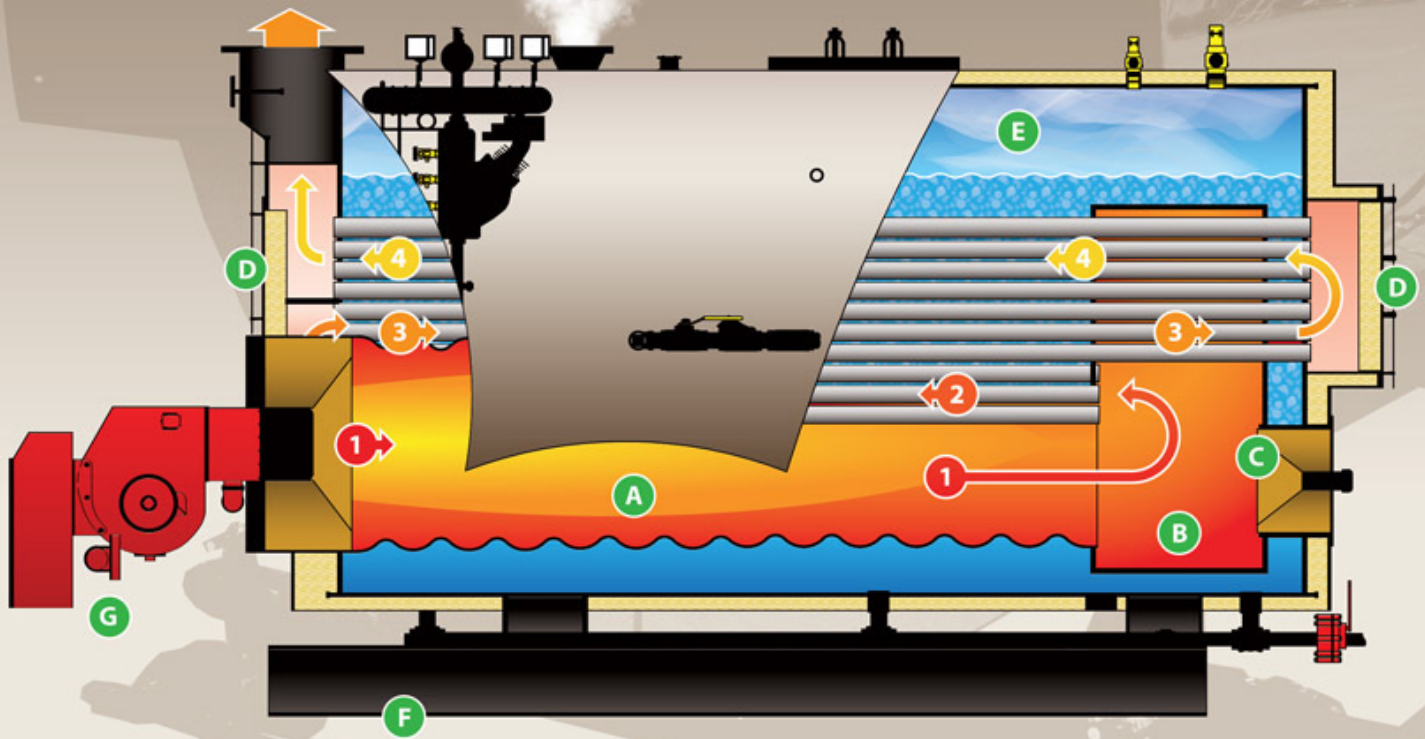

- A. Corrugated furnace chamber
- B. Wet-Back
- C. Manhole access
- D. No refractory in doors

- E. Ample steam dome
- F. Structural steel base
- G. Weishaupt, Riello, Webster, Johnson or Powerflame burner

- 1. First pass.
- 2. Second pass.
- 3. Third pass.
- 4. Fourth pass.