

Powermaster®

Powermaster^{SWB}

- » Capacities: 10 to 60 BHP
- » Pressures: Up to 300 psi
- » Service: Dry Saturated steam
- » Fuels: Gas / Oil / combination Gas & Oil




Liaison Office
Houston, Texas

8300 Cypress Creek Parkway
Suite 450 | Houston, TX 77070
T. (713) 999 1213

www.powermasterboiler.com

Characteristics

- » Three pass scotch marine design
- » Designed and manufactured as per ASME Section I or IV
- » Hot corrugated large furnace chamber with low fatigue coefficient
- » High efficiency
- » Completely automatic operation
- » Integrated control panel
- » Semi-Wet-Back design with only a small refractory in the back

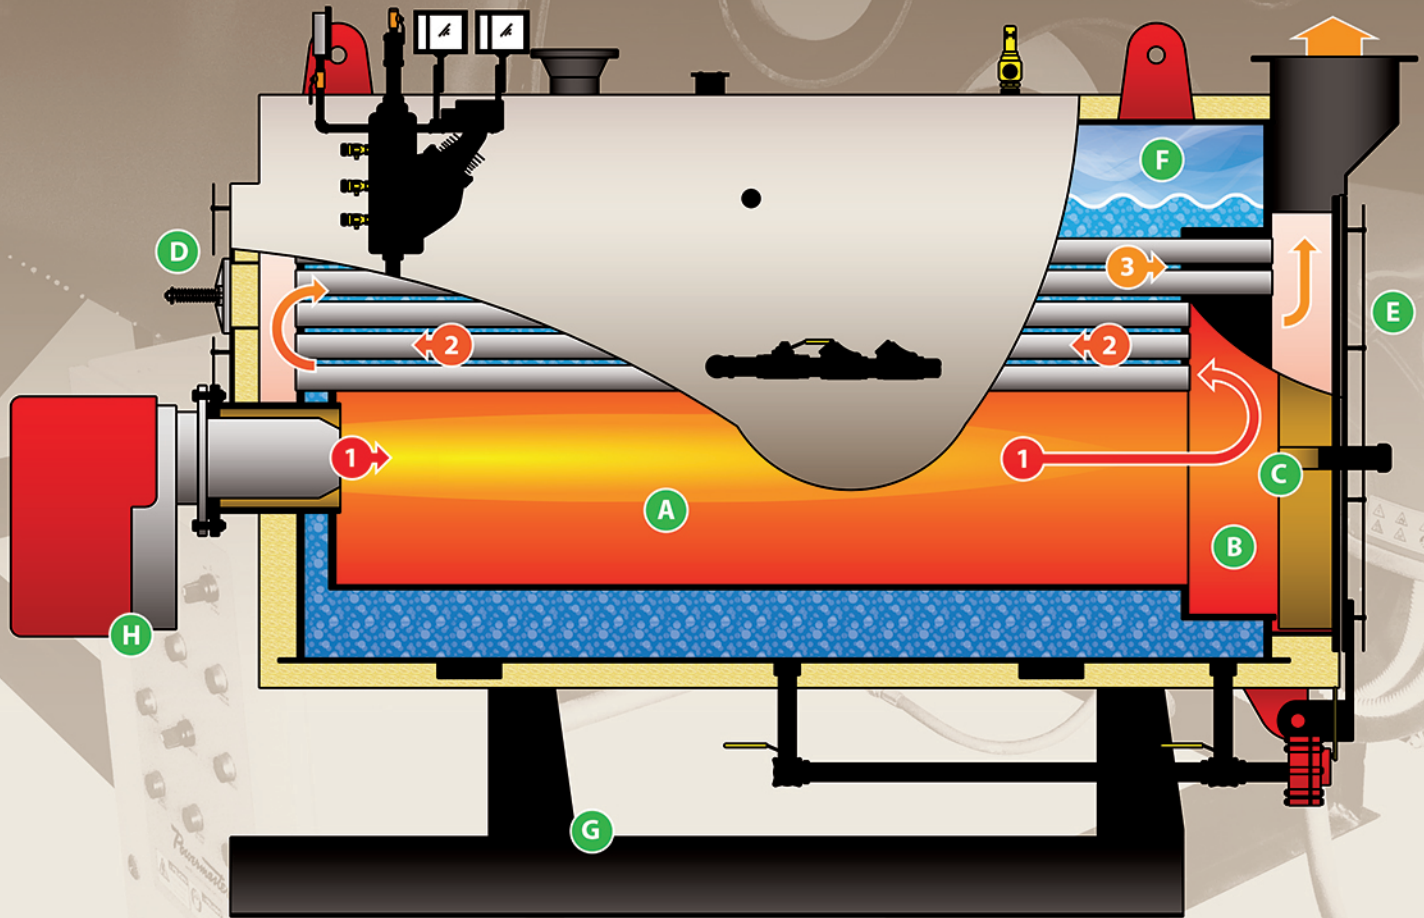

- A.** Furnace
- B.** Semi-Wet-Back design
- C.** Sightglass
- D.** Gas side relief valves

- E.** Small refractory in back door
- F.** Large steam dome
- G.** Structural steel base
- H.** Will suit any brand of burner

- 1.** First pass.
- 2.** Second pass.
- 3.** Third pass.